

GIA Gem Database | Edward J. Gübelin Collection



© GIA. Photo by Robert Weldon.

Description

Shape: Round Weight: 20.88 ct Dimensions: 16.37 x 16.70 x 10.24 mm Diaphaneity: Transparent Color: Medium dark, vivid, Orange



Facet Diagram: top | side | bottom

Species - Variety:

Sphalerite

Locality (as stated in Dr. Gübelin's records):

Spain, Cantabria Province, Camaleño (Las Manforas Mine)

GIA Collection Number: 34114

Gemological Properties

Optical Character: Isotropic Refractive Index: Over the limit Birefringence: Not applicable Specific Gravity: 4.11 Pleochroism: None Luster: Vitreous Phenomenon: None Fluorescence: LWUV: None SWUV: None Phosphorescence: LWUV: None SWUV: None SWUV: None SWUV: None SWUV: None SWUV: None

Photomicrograph

The most prominent feature of this sphalerite is orange and yellow color zoning.



© GIA. Photomicrograph by John Koivula.




6000


5000

4000

3000

Wavenumber (cm⁻¹)

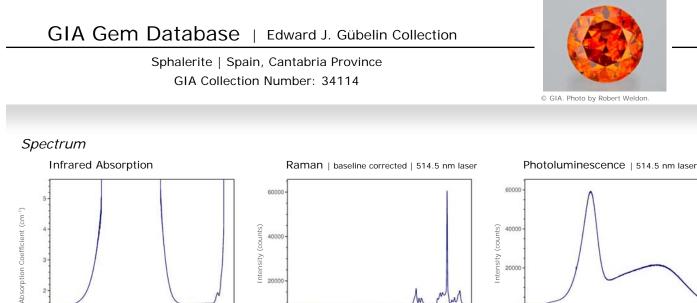



1800 1600 1400 1200 1000 800

Raman Shift (cm-1)

600 400

2000


2000

2000

1000

Raman spectra were collected over the range 100–2000 cm⁻¹ Raman shift using a Renishaw InVia Raman microscope (3 additive scans, and excitation produced by 514.5 nm Ar-ion or 633 nm He-Ne lasers). Analysis was done using a focused beam on the table facet of the gemstone unless otherwise noted.

Photoluminescence spectra were collected in the 517–1000 nm range using a Renishaw InVia Raman microscope (single scan, and excitation produced by 514.5 nm Ar-ion laser). Analysis was done using a focused beam on the table facet of the gemstone unless otherwise noted, and the laser intensity was adjusted to avoid detector saturation caused by sample fluorescence.

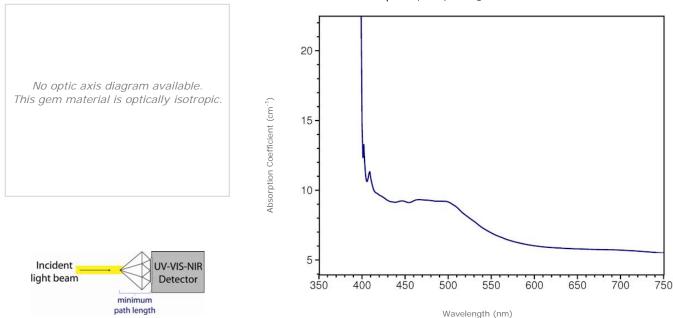

Visible Absorption | min. path length: 10.2 mm

(COU

2000

600 650


700 750 800 850

Wavelength (nm)


900 050

Transmission absorption spectra in the UV to near-IR range (250-1000 nm) were collected using a Hitachi U4001 spectrometer (2.0 nm slit, 1.0 nm data interval, and 120 nm/min scan speed). Unless otherwise noted, an unpolarized light beam was focused on the culet area of the optically unoriented sample.





Chemistry | EDXRF

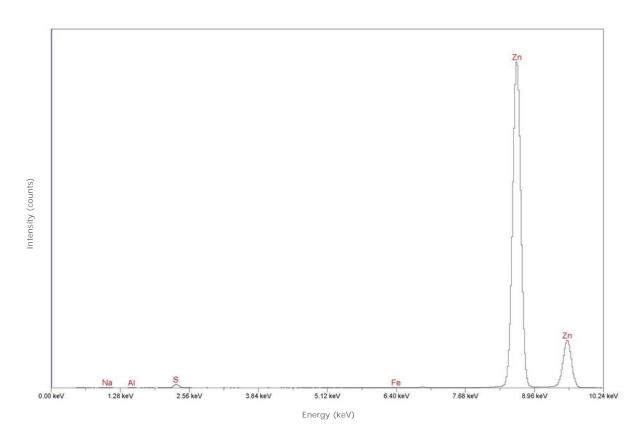

Qualitative energy-dispersive X-ray fluorescence (EDXRF) data were collected using a Thermo ARL QuantX EDXRF analyzer (15 kV, 0.02–1.98 mA (auto adjusted based on deadtime), 100 seconds livetime, vacuum atmosphere, aluminum filter). These conditions were selected to optimize the detection of the transition metals (such as iron or chromium) that are responsible for the coloration of most gemstones. Only the peaks for chemical elements that were clearly identifiable are labeled by element symbols in the spectrum. Most other peaks are diffraction artifacts. Our EDXRF method can detect most elements with higher atomic numbers than sodium (Z=11) in the Periodic Table; depending on the element, the lower limit of detection is between 1 and 100 parts per million (0.0001 to 0.01%).